



ENERG


енергия · ενεργεια



Indoor unit EHPT20X-**C(W)
Outdoor unit PUHZ-HW140VHA2(-BS)



A++

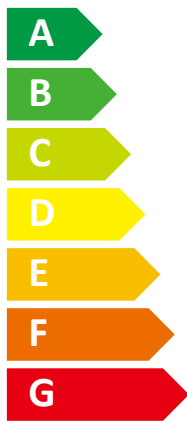

A



40 dB



67 dB



- 14 kW
- 16 kW**
- 14 kW

2015

811/2013

RG79Y768H05



ENERG


енергия · ενεργεια



Indoor unit EHPT20X-**C(W)
Outdoor unit PUHZ-HW140YHA2(-BS)



A++

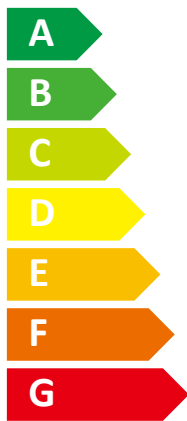

A



40 dB



67 dB



- 14 kW
- **16 kW**
- 14 kW

2015

811/2013

RG79Y768H06

	English Nederlands suomi	Deutsch Svenska Čeština	Français Dansk Български	Italiano Português Polski	Español Ελληνικά
1	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
	buitenunit	Utomhusenhet	Udenders enhed	unidade exterior	Εξωτερική μονάδα
	Ulkoyksikkö	Venkovní jednotka	Външно тяло	jednostka zewnętrzna	-
2	Indoor unit	Innengerät	unité intérieure	unità interna	unidad interior
	binnenunit	Inomhusenhet	Indenders enhed	unidade interior	Εσωτερική μονάδα
	Sisäyksikkö	Vnitřní jednotka	Вътрешно тяло	jednostka wewnętrzna	-
3	Medium-temperature application	Mitteltemperaturanwendung	l'application à moyenne température	le applicazioni a media temperatura	la aplicación de media temperatura
	midtemperatuur-toepassing	mediumtemperatuurapplikation	mitteltemperaturanvendelsen	a aplicação a média temperatura	η εφαρμογή σε μέση θερμοκρασία
	keskilämpötilan sovellus	středněteplotní aplikace	среднотемпературното приложение	zastosowania w średnich temperaturach	-
4	Low-temperature application	Niedertemperaturanwendung	l'application à basse température	le applicazioni a bassa temperatura	la aplicación de baja temperatura
	lagtemperatuur-toepassing	lägtemperatuurapplikation	lavtemperaturanvendelsen	a aplicação a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
	matalanlämpötilan sovellus	nizkoteplotní aplikace	нискотемпературни приложения	zastosowania w niskich temperaturach	-
5	Seasonal space heating energy efficiency class	die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux	la classe di efficienza energetica stagionale del riscaldamento d'ambiente	la clase de eficiencia energética estacional de calefacción
	de seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	säsongrelaterade energieeffektivitetsklass vid rumsuppvärmning	klassen for årsvirkningsgrad ved rumopvarmning	A classe de eficiência energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης της εποχιακής θέρμανσης χώρου
	tilalämmityksen kausittainen energiatehokkuusluokka	řídná sezonní energetická účinnost vytápění	класът на сезонната отоплителна енергийна ефективност	klasa sezonowej efektywności energetycznej ogrzewania pomieszczeń	-
6	Water heating energy efficiency class	die Klasse für die Warmwasserbereitungs-Energieeffizienz	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe di efficienza energetica del riscaldamento dell'acqua	la clase de eficiencia energética del caldeo de agua
	de energie-efficiëntieklasse voor waterverwarming	energieeffektivitetsklass vid vattenuppvärmning	klassen for årsvirkningsgrad ved vandopvarmning	A classe de eficiência energética do aquecimento de água	η τάξη ενεργειακής απόδοσης θέρμανσης νερού
	vedenlämmityksen energiatehokkuusluokka	řídná energetická účinnost ohřevu vody	класът на енергийната ефективност при подгръване на вода	klasa efektywności energetycznej podgrzewania wody	-
7	Rated heat output under average climate conditions	die Wärmenenleistung bei durchschnittlichen Klimaverhältnissen	la puissance thermique nominale dans les conditions climatiques moyennes	la potenza termica nominale(in condizioni climatiche medie)	la potencia calorífica nominal(en condiciones climáticas medias)
	de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden)	Den nominella avgivna värmeeffekten(under genomsnittliga klimatförhållanden)	den nominelle nytteeffekt(under gennemsnitlige klimaforhold)	A potência calorífica nominal(em condições climáticas médias)	η ονομαστική θερμική ισχύς(υπό μέσες κλιματικές συνθήκες)
	nimellislämpöteho(keskimääräisissä ilmastoloosuhteissa)	jménovitý tepelný výkon(za průměrných klimatických podmínek)	номиналната топлинна мощност(при средни климатични условия)	znamiönowa moc cieplna(w warunkach klimatu umiarkowanego)	-
8	For space heating, annual energy consumption under average climate conditions	für die Raumheizung, den jährlichen Energieverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calentar espacios, el consumo anual de energía(en condiciones climáticas medias)
	voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	För rumsuppvärmning, årlig energiförbrukning(vid genomsnittliga klimatförhållanden)	for rumopvarmning det årlige energiforbrug(under gennemsnitlige klimaforhold)	Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas médias)	για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας(υπό μέσες κλιματικές συνθήκες)
	tilalämmityksestä vuotuinen energiankulutus(keskimääräisissä ilmastoloosuhteissa)	pro vytápění – roční spotřeba energie za průměrných klimatických podmínek	за отопление, годишното потребление на енергия(при средни климатични условия)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego)	-
9	For water heating, annual electricity consumption under average climate conditions	für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	para calentar agua, el consumo anual de electricidad(en condiciones climáticas medias)
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	För vattenuppvärmning, årlig elförbrukning(vid genomsnittliga klimatförhållanden)	for vandopvarmning det årlige elforbrug(under gennemsnitlige klimaforhold)	para o aquecimento de água, o consumo anual de eletricidade(em condições climáticas médias)	για την θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσες κλιματικές συνθήκες)
	vedenlämmityksestä vuotuinen sähkönkulutus(keskimääräisissä ilmastoloosuhteissa)	pro ohřev vody – roční spotřeba elektrické energie za průměrných klimatických podmínek	за подгръване на вода, годишното потребление(при средни климатични условия)	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego)	-
10	Seasonal space heating energy efficiency under average climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	l'efficienza energetica stagionale di riscaldamento d'ambiente(in condizioni climatiche medie)	la eficiencia energética estacional de calefacción(en condiciones climáticas medias)
	de seizoensgebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	Säsongsmedelverkningsgrad för rumsuppvärmning(vid genomsnittliga klimatförhållanden)	årsvirkningsgraden ved rumopvarmning(under gennemsnitlige klimaforhold)	A eficiência energética do aquecimento ambiente sazonal(em condições climáticas médias)	η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου(υπό μέσες κλιματικές συνθήκες)
	tilalämmityksen kausittainen energiatehokkuus(keskimääräisissä ilmastoloosuhteissa)	sezonní energetická účinnost vytápění za průměrných klimatických podmínek	сезонната енергийна ефективност при отопление(при средни климатични условия)	sezonowa efektywność energetyczna ogrzewania pomieszczeń(w warunkach klimatu umiarkowanego)	-
11	Water heating energy efficiency under average climate conditions	die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes)	l'efficienza energetica di riscaldamento dell'acqua(in condizioni climatiche medie)	la eficiencia energética del caldeo de agua(en condiciones climáticas medias)
	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Energieeffektivitet ved vattenuppvärmning(vid genomsnittliga klimatförhållanden)	energieeffektiviteten ved vandopvarmning(under gennemsnitlige klimaforhold)	a eficiência energética do aquecimento de água(em condições climáticas médias)	η ενεργειακή απόδοση θέρμανσης νερού(υπό μέσες κλιματικές συνθήκες)
	vedenlämmityksen energiatehokkuus(keskimääräisissä ilmastoloosuhteissa)	energetická účinnost ohřevu vody za průměrných klimatických podmínek	енергийната ефективност при подгръване на вода(при средни климатични условия)	a efektywność energetyczna podgrzewania wody(w warunkach klimatu umiarkowanego)	-
12	Sound power level L _{WA} indoor	der Schalleistungspegel L _{WA} in Gebäuden	le niveau de puissance acoustique L _{WA} , à l'intérieur	il livello di potenza sonora L _{WA} all'interno	el nivel de potencia acústica L _{WA} en interiores
	het geluidsvermogensniveau L _{WA} binnen	Ljudeffektivit L _{WA} i inomhus	lydeeffektivit L _{WA} i inde	O nível de potência sonora L _{WA} no interior	η στάθμη ηχητικής ισχύος L _{WA} εσωτερικού χώρου
	äänitehotaso L _{WA} sisällä	hladina akustického výkonu L _{WA} ve vnitřním prostoru	ниво на звуковата мощност L _{WA} на закрито	poziom mocy akustycznej L _{WA} w pomieszczeniu	-
13	Work only during off-peak hours	dass ein ausschließlicher Betrieb des Kombiheizgerätes zu Schwachlastzeiten	fonctionner qu'en heures creuses	funzione soltanto durante le ore morte	funcionar solamente durante las horas de baja demanda
	werken uitsluitend in de daluren	drivas uteslutande under perioder med låg belastning	fungere uden for spidsbelastningsperioder	de funcionar unicamente fora das horas de pico	λειτουργία μόνο εκτός των ωρών αιχμής
	toimimaan ainoastaan kulutushuippujen ulkopuolella	provozu pouze mimo špičku	работи само в часовете извън върховото натоварване	pracować jedynie w godzinach poza szczytowym obciążeniem	-
14	Rated heat output under colder climate conditions	die Wärmenenleistung bei kälteren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potencia calorífica nominal en condiciones climáticas más frías
	de nominale warmteafgifte, onder koudere klimaatomstandigheden	Nominell avgiven värmeeffekt vid kallare klimatförhållanden	den nominelle nytteeffekt under koldere klimaforhold	A potência calorífica nominal em condições climáticas mais frias	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
	nimellislämpöteho, kylmissä ilmastoloosuhteissa	jménovitý tepelný výkon za chladnějších klimatických podmínek	номиналната топлинна мощност при по-студени климатични условия	znamiönowa moc cieplna w warunkach klimatu chłodnego	-
15	Rated heat output under warmer climate conditions	die Wärmenenleistung bei wärmeren Klimaverhältnissen	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la potenza termica nominale, in condizioni climatiche più calde	la potencia calorífica nominal en condiciones climáticas más cálidas
	de nominale warmteafgifte, onder warmere klimaatomstandigheden	Nominell avgiven värmeeffekt vid varmare klimatförhållanden	den nominelle nytteeffekt under varmere klimaforhold	A potência calorífica nominal em condições climáticas mais quentes	η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
	nimellislämpöteho, lämpimissä ilmastoloosuhteissa	jménovitý tepelný výkon za teplejších klimatických podmínek	номиналната топлинна мощност при по-топли климатични условия	znamiönowa moc cieplna w warunkach klimatu ciepłego	-
16	For space heating, annual energy consumption under colder climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei kälteren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde	para calentar espacios, el consumo anual de energía en condiciones climáticas más frías
	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden	För rumsuppvärmning, årlig energiförbrukning under kallare klimatförhållanden	for rumopvarmning det årlige energiforbrug under koldere klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias	για θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	tilalämmityksestä vuotuinen energiankulutus kylmissä ilmastoloosuhteissa	pro vytápění – roční spotřeba energie za chladnějších klimatických podmínek	за отопление, годишното потребление на енергия при по-студени климатични условия	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu chłodnego	-
17	For space heating, annual energy consumption under warmer climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	para calentar espacios, el consumo anual de energía en condiciones climáticas más cálidas
	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden	För rumsuppvärmning, årlig energiförbrukning under varmare klimatförhållanden	for rumopvarmning det årlige energiforbrug under varmere klimaforhold	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes	για θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες
	tilalämmityksestä vuotuinen energiankulutus lämpimissä ilmastoloosuhteissa	pro vytápění – roční spotřeba energie za teplejších klimatických podmínek	за отопление, годишното потребление на енергия при по-топли климатични условия	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu ciepłego	-
18	For water heating, annual energy consumption under colder climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde e più calde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más frías
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	För vattenuppvärmning, årlig elförbrukning under kallare klimatförhållanden	for vandopvarmning det årlige elforbrug under koldere klimaforhold	para o aquecimento de água, o consumo anual de eletricidade em condições climáticas mais frias	για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες
	vedenlämmityksestä vuotuinen sähkönkulutus kylmissä ilmastoloosuhteissa	pro ohřev vody – roční spotřeba elektrické energie za chladnějších klimatických podmínek	за подгръване на вода, годишното потребление на електроенергия при по-студени климатични условия	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu chłodnego	-
19	For water heating, annual energy consumption under warmer climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde e più calde	para calentar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	För vattenuppvärmning, årlig elförbrukning under varmare klimatförhållanden	for vandopvarmning det årlige elforbrug under varmere klimaforhold	para o aquecimento de água, o consumo anual de eletricidade em condições climáticas mais quentes	για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό θερμότερες κλιματικές συνθήκες
	vedenlämmityksestä vuotuinen sähkönkulutus lämpimissä ilmastoloosuhteissa	pro ohřev vody – roční spotřeba elektrické energie za teplejších klimatických podmínek	за подгръване на вода, годишното потребление на електроенергия при по-топли климатични условия	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu ciepłego	-
20	Seasonal space heating energy efficiency under colder climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälteren Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides	l'efficienza energetica stagionale di riscaldamento d'ambiente in condizioni climatiche più fredde	la eficiencia energética estacional de calefacción en condiciones climáticas más frías
	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden	Säsongsmedelverkningsgrad för rumsuppvärmning under kallare klimatförhållanden	årsvirkningsgraden ved rumopvarmning under koldere klimaforhold	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias	η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου υπό ψυχρότερες κλιματικές συνθήκες
	tilalämmityksen kausittainen energiatehokkuus kylmissä ilmastoloosuhteissa	sezonní energetická účinnost vytápění za chladnějších klimatických podmínek	сезонната енергийна ефективност при отопление при по-студени климатични условия	sezonowa efektywność energetyczna ogrzewania pomieszczeń w warunkach klimatu chłodnego	-
21	Seasonal space heating energy efficiency under warmer climate conditions	die jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	l'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes	l'efficienza energetica stagionale di riscaldamento d'ambiente in condizioni climatiche più calde	la eficiencia energética estacional de calefacción en condiciones climáticas más cálidas
	de seizoensgebonden energie-efficiëntie voor ruimteverwarming onder warmere klimaatomstandigheden	Säsongsmedelverkningsgrad för rumsuppvärmning under varmare klimatförhållanden	årsvirkningsgraden ved rumopvarmning under varmere klimaforhold	A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes	η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες
	tilalämmityksen kausittainen energiatehokkuus lämpimissä ilmastoloosuhteissa	sezonní energetická účinnost vytápění za teplejších klimatických podmínek	сезонната енергийна ефективност при отопление при по-топли климатични условия	sezonowa efektywność energetyczna ogrzewania pomieszczeń w warunkach klimatu ciepłego	-
22	Water heating energy efficiency under colder climate conditions	die Warmwasserbereitungs-Energieeffizienz bei kälteren Klimaverhältnissen	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides	l'efficienza energetica di riscaldamento dell'acqua in condizioni climatiche più fredde	la eficiencia energética de caldeo de agua en condiciones climáticas más frías
	de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden	Energieeffektivitet ved vattenuppvärmning under kallare klimatförhållanden	energieeffektiviteten ved vandopvarmning under koldere klimaforhold	a eficiência energética do aquecimento de água em condições climáticas mais frias	η ενεργειακή απόδοση της θέρμανσης νερού υπό ψυχρότερες κλιματικές συνθήκες
	vedenlämmityksen energiatehokkuus kylmissä ilmastoloosuhteissa	energetická účinnost ohřevu vody za chladnějších klimatických podmínek	енергийната ефективност при подгръване на вода при по-студени климатични условия	efektywność energetyczna podgrzewania wody w warunkach klimatu chłodnego	-
23	Water heating energy efficiency under warmer climate conditions	die Warmwasserbereitungs-Energieeffizienz bei wärmeren Klimaverhältnissen	l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	l'efficienza energetica di riscaldamento dell'acqua in condizioni climatiche più calde	la eficiencia energética de caldeo de agua en condiciones climáticas más cálidas
	de energie-efficiëntie voor waterverwarming onder warmere klimaatomstandigheden	Energieeffektivitet ved vattenuppvärmning under varmare klimatförhållanden	energieeffektiviteten ved vandopvarmning under varmere klimaforhold	a eficiência energética do aquecimento de água em condições climáticas mais quentes	η ενεργειακή απόδοση της θέρμανσης νερού υπό θερμότερες κλιματικές συνθήκες
	vedenlämmityksen energiatehokkuus kylmissä ilmastoloosuhteissa	energetická účinnost ohřevu vody za teplejších klimatických podmínek	енергийната ефективност при подгръване на вода при по-топли климатични условия	efektywność energetyczna podgrzewania wody w warunkach klimatu ciepłego	-
24	Sound power level L _{WA} outdoor	der Schalleistungspegel L _{WA} im Freien	le niveau de puissance acoustique L _{WA} à l'extérieur	il livello di potenza sonora L _{WA} all'esterno	el nivel de potencia acústica L _{WA} en exteriores
	het geluidsvermogensniveau L _{WA} buiten	Ljudeffektivit L _{WA} i utomhus	lydeeffektivit L _{WA} i ude	O nível de potência sonora L _{WA} no exterior	η στάθμη ηχητικής ισχύος L _{WA} εξωτερικού χώρου
	äänitehotaso L _{WA} ulkona	hladina akustického výkonu L _{WA} ve venkovním prostoru	ниво на звуковата мощност L _{WA} на открито	poziom mocy akustycznej L _{WA} na zewnątrz	-

Model(s):	Outdoor unit:	PUHZ-HW140VHA2/YHA2(-BS)
	Indoor unit:	EHPT20X-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		yes
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	15.8	kW	Seasonal space heating energy efficiency	η_s	126	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	14.0	kW	Tj = - 7 °C	COPd	2.01	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	8.5	kW	Tj = + 2 °C	COPd	3.23	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	5.5	kW	Tj = + 7 °C	COPd	4.02	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	7.3	kW	Tj = +12 °C	COPd	5.33	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = bivalent temperature	Pdh	14.0	kW	Tj = bivalent temperature	COPd	2.01	-
Tj = operation limit temperature	Pdh	10.0	kW	Tj = operation limit temperature	COPd	1.45	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-25	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	2.5	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40/67	dBA				
Annual energy consumption	Q _{HE}	10015	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	96	%
Daily electricity consumption	Q _{elec}	5.200	kWh/h				
Annual electricity consumption	AEC	1145	kWh/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-HW140VHA2/YHA2(-BS)
	Indoor unit:	EHPT20X-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		yes
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	15.8	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	14.0	kW	Tj = - 7 °C	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 2 °C	Pdh	8.5	kW	Tj = + 2 °C	COPd	4.24	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 7 °C	Pdh	5.5	kW	Tj = + 7 °C	COPd	4.81	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = +12 °C	Pdh	7.6	kW	Tj = +12 °C	COPd	5.95	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = bivalent temperature	Pdh	14.0	kW	Tj = bivalent temperature	COPd	2.55	-
Tj = operation limit temperature	Pdh	10.0	kW	Tj = operation limit temperature	COPd	1.38	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-25	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	2.5	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40/67	dBA				
Annual energy consumption	Q _{HE}	8049	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	96	%
Daily electricity consumption	Q _{elec}	5.200	kWh/h				
Annual electricity consumption	AEC	1145	kWh/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-HW140VHA2/YHA2(-BS)
	Indoor unit:	EHPT20X-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		yes
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.5	kW	Seasonal space heating energy efficiency	η_s	113	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	8.2	kW	Tj = - 7 °C	COPd	2.64	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 2 °C	Pdh	5	kW	Tj = + 2 °C	COPd	3.25	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 7 °C	Pdh	5.3	kW	Tj = + 7 °C	COPd	4.17	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = +12 °C	Pdh	7.4	kW	Tj = +12 °C	COPd	5.35	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = bivalent temperature	Pdh	11.0	kW	Tj = bivalent temperature	COPd	1.50	-
Tj = operation limit temperature	Pdh	10.0	kW	Tj = operation limit temperature	COPd	1.38	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.0	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.50	-
Bivalent temperature	Tbiv	-15	°C	Operation limit temperature	TOL	-25	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	3.2	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40/67	dBA				
Annual energy consumption	Q _{HE}	11231	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	80	%
Daily electricity consumption	Q _{elec}	6.300	kWh				
Annual electricity consumption	AEC	1377	kWh				

Contact details			
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS		3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528,	Japan

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-HW140VHA2/YHA2(-BS)
	Indoor unit:	EHPT20X-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		yes
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.5	kW	Seasonal space heating energy efficiency	η_s	144	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	8.2	kW	Tj = - 7 °C	COPd	3.56	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 2 °C	Pdh	5	kW	Tj = + 2 °C	COPd	4.16	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 7 °C	Pdh	5.6	kW	Tj = + 7 °C	COPd	5.06	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = +12 °C	Pdh	7.6	kW	Tj = +12 °C	COPd	5.95	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = bivalent temperature	Pdh	11.0	kW	Tj = bivalent temperature	COPd	1.79	-
Tj = operation limit temperature	Pdh	10.0	kW	Tj = operation limit temperature	COPd	1.38	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	11.0	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.79	-
Bivalent temperature	Tbiv	-15	°C	Operation limit temperature	TOL	-25	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	3.2	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40/67	dBA				
Annual energy consumption	Q _{HE}	8786	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	80	%
Daily electricity consumption	Q _{elec}	6.300	kWh				
Annual electricity consumption	AEC	1377	kWh				

Contact details			
MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS		3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan	

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-HW140VHA2/YHA2(-BS)
	Indoor unit:	EHPT20X-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		yes
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	137	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	14	kW	Tj = + 2 °C	COPd	2.14	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 7 °C	Pdh	9.0	kW	Tj = + 7 °C	COPd	3.13	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = +12 °C	Pdh	7.2	kW	Tj = +12 °C	COPd	4.55	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = bivalent temperature	Pdh	14.0	kW	Tj = bivalent temperature	COPd	1.91	-
Tj = operation limit temperature	Pdh	10.0	kW	Tj = operation limit temperature	COPd	1.38	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-25	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40/67	dBA				
Annual energy consumption	Q _{HE}	5304	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	102	%
Daily electricity consumption	Q _{elec}	4.900	kWh/h				
Annual electricity consumption	AEC	1083	kWh/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-HW140VHA2/YHA2(-BS)
	Indoor unit:	EHPT20X-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		yes
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	188	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	14	kW	Tj = + 2 °C	COPd	3.11	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = + 7 °C	Pdh	9.0	kW	Tj = + 7 °C	COPd	4.78	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = +12 °C	Pdh	7.5	kW	Tj = +12 °C	COPd	5.64	-
Degradation co-efficient (**)	Cdh	0.90	-				
Tj = bivalent temperature	Pdh	14.0	kW	Tj = bivalent temperature	COPd	2.55	-
Tj = operation limit temperature	Pdh	10.0	kW	Tj = operation limit temperature	COPd	1.38	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-25	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items

Capacity control	variable			Rated air flow rate, outdoors	-	6000	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40/67	dBA				
Annual energy consumption	Q _{HE}	3872	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	102	%
Daily electricity consumption	Q _{elec}	4.900	kWh/h				
Annual electricity consumption	AEC	1083	kWh/h				

Contact details

MITSUBISHI ELECTRIC CORPORATION SHIZUOKA WORKS

3-18-1, Oshika, Suruga-ku, Shizuoka 422-8528, Japan

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.