

Heating

Product Information

PUHZ-SW50-120VKA/VHA(-BS)

Ecodan Split Air Source Heat Pumps

Making a
World of
Difference



Designed to meet
the demands of
today's heating
needs



Certificate Number: MCS HP0002
Product Reference: PUHZ-SW50VKA, PUHZ-SW75VHA,
PUHZ-SW120VHA

Our range of Ecodan split air source heat pumps includes 5, 7.5 and 12kW sizes. Now with the ability to cascade up to six units of the same output Ecodan split systems offer a capacity range from 5 to 72kW. Designed to suit a wide number of applications, these models offer a viable solution for the varying requirements that domestic and small commercial applications demand.

Key Features


- Split unit allowing water connections to be made internally
- No need for gas supply, flues or ventilation
- Single phase power supply with a low starting current
- Low maintenance and quiet operation
- Operates with outside temperatures as low as -20°C
- Multiple unit connection
- Hybrid function for use with conventional boilers
- 2-zone energy efficient space heating control
- Energy monitoring as standard
- Coastal protection models available (-BS)

Application Examples

- The vast majority of UK homes
- Small Retail Outlets
- Dental / Doctor's Surgeries
- Public Sector / Commercial Buildings



Air Conditioning | Heating
Ventilation | Controls

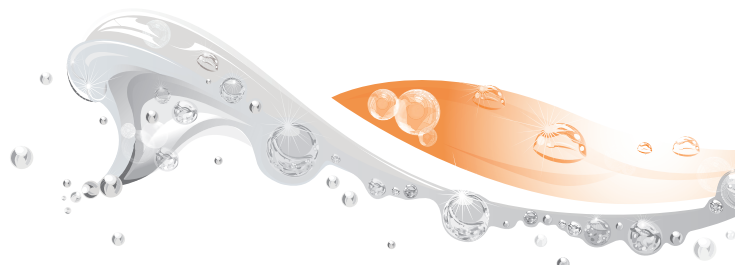

ecodan[®]
Renewable Heating Technology

Product Information

PUHZ-SW50-120VKA/VHA(-BS)

Ecodan Split Air Source Heat Pumps

Making a World of Difference

OUTDOOR UNIT		PUHZ-SW50VKA(-BS)	PUHZ-SW75VHA(-BS)	PUHZ-SW120VHA(-BS)	
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++	A++	A++	
	η _s	125%	127%	125%	
	SCOP	3.20	3.26	3.21	
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A++	A++	A++	
	η _s	163%	154%	162%	
	SCOP	4.16	3.92	4.13	
HEAT PUMP COMBINATION HEATER - Large Profile ¹	ErP Rating	A	A	A	
	η _{wh}	98%	93%	99%	
HEATING ² (A-3/W35)	Capacity (kW)	3.8	7.0	11.2	
	Power Input (kW)	1.27	2.24	3.71	
	COP	2.99	3.12	3.02	
	OPERATING AMBIENT TEMPERATURE (°C DB) ⁷	-15 ~ +35°C	-20 ~ +35°C	-20 ~ +35°C	
SOUND PRESSURE LEVEL AT 1M (dBA) ^{3/4}		46	51	54	
LOW NOISE MODE (dBA) ³		42	48	51	
WATER DATA - Water connections made at indoor hydrobox DIMENSIONS (mm)	Flow Rate (l/min)	11.8	22.9	45.9	
	Width	809+62*	950	950	
	Depth	300	330+30 ⁵	330+30 ⁵	
	Height	630	943	1350	
WEIGHT (kg)		43	75	118	
REFRIGERANT	Type	R410A	R410A	R410A	
	Charge (kg) - 10m pipe length	1.4	3.2	4.6	
	Pipe Size - Gas/Liquid (mm (in))	12.7 (1/2") / 6.35 (1/4")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	
	Connection Type	Flared	Flared	Flared	
	Max Pipe Length (m)	40	40	75	
	Min Pipe Length (m)	2	5	5	
	Max Height Difference (m)	30	10	30	
	ELECTRICAL DATA	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
		Phase	Single	Single	Single
Nominal Running Current [MAX] (A)		3.8 [13]	8.1 [19]	17.5 [29.5]	
Fuse Rating - MCB Sizes (A) ⁶		16	25	40	

*1 Combination with EHST20(D)(C)-MHCW Cylinders

*2 Under normal heating conditions at outdoor temp: -3°CDB / -4°CWB, outlet water temp 35°C, inlet water temp 30°C

*3 Under normal heating conditions at outdoor temp: 7°CDB / 6°CWB, outlet water temp 35°C, inlet water temp 30°C as tested to BS EN14511

*4 Sound

*6 MCB Sizes BS EN60898-2 & BS EN60947-2

*7 Heating maximum ambient temperature ~21°CDB, DHW Hot water maximum ambient temperature ~35°CDB


*8 Electrical cover

η is the seasonal space heating energy efficiency (SSHEF) η_w is the water heating energy efficiency


DIMENSIONS

■ PUAZ-SW50VKA(-BS)

Upper View




Front View




■ PUAZ-SW75VHA(-BS)

Upper View

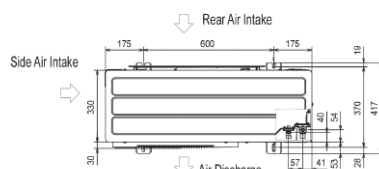


Front View

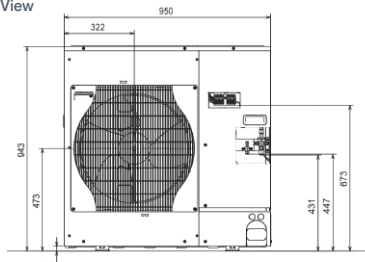


■ PUAZ-SW120VHA(-BS)

Upper View



Front View



Premier Technology Engineering Ltd.,

Shinagh, Bandon, Co. Cork P72 HD29, Ireland.

Tel; 023 8841028.

info@premiertechnology.ie www.premiertechnology.ie



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment
to the environment



Follow us @meuk_les
Follow us @green_gateway



Mitsubishi Electric
Living Environmental Systems UK



[youtube.com/mitsubishielectric2](https://www.youtube.com/mitsubishielectric2)



Printed on September 26th 2015 SAP No. 282527